How to Pair TP-Link Powerline adaptors

Step 1: Power on the Powerline adapters.

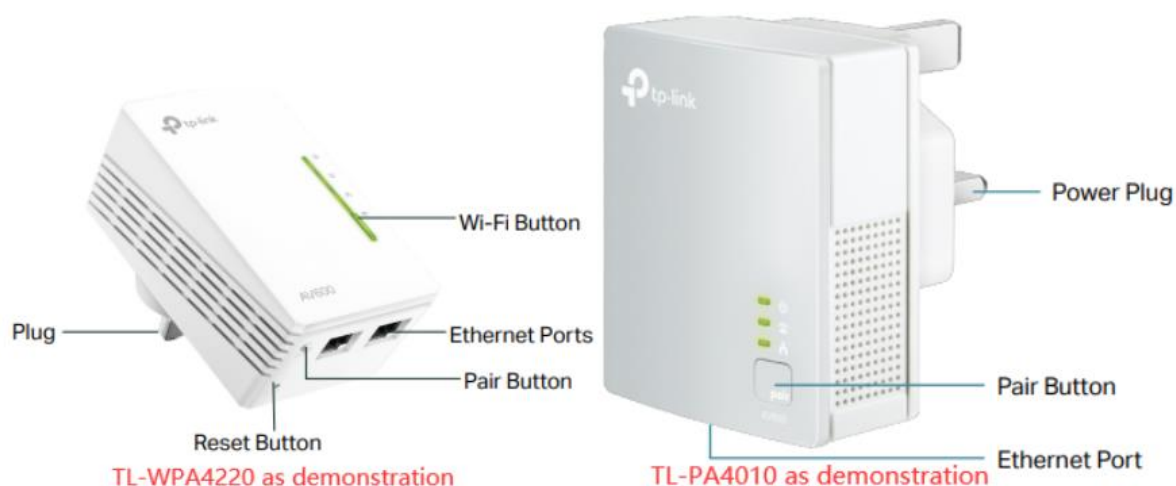Plug both the Powerline adaptors into a wall socket near one another.

Note: We recommend that you plug in your Powerline devices as close to each other as possible when pairing. Then relocate to where they are needed once pairing is complete.

One Powerline adapter is required to connect to the router via an Ethernet cable.

Step 2: Pair the Powerline adapters.

a. Press and hold the Pair button for one second on the Powerline Adapter. Then the Power light will be blinking quickly.

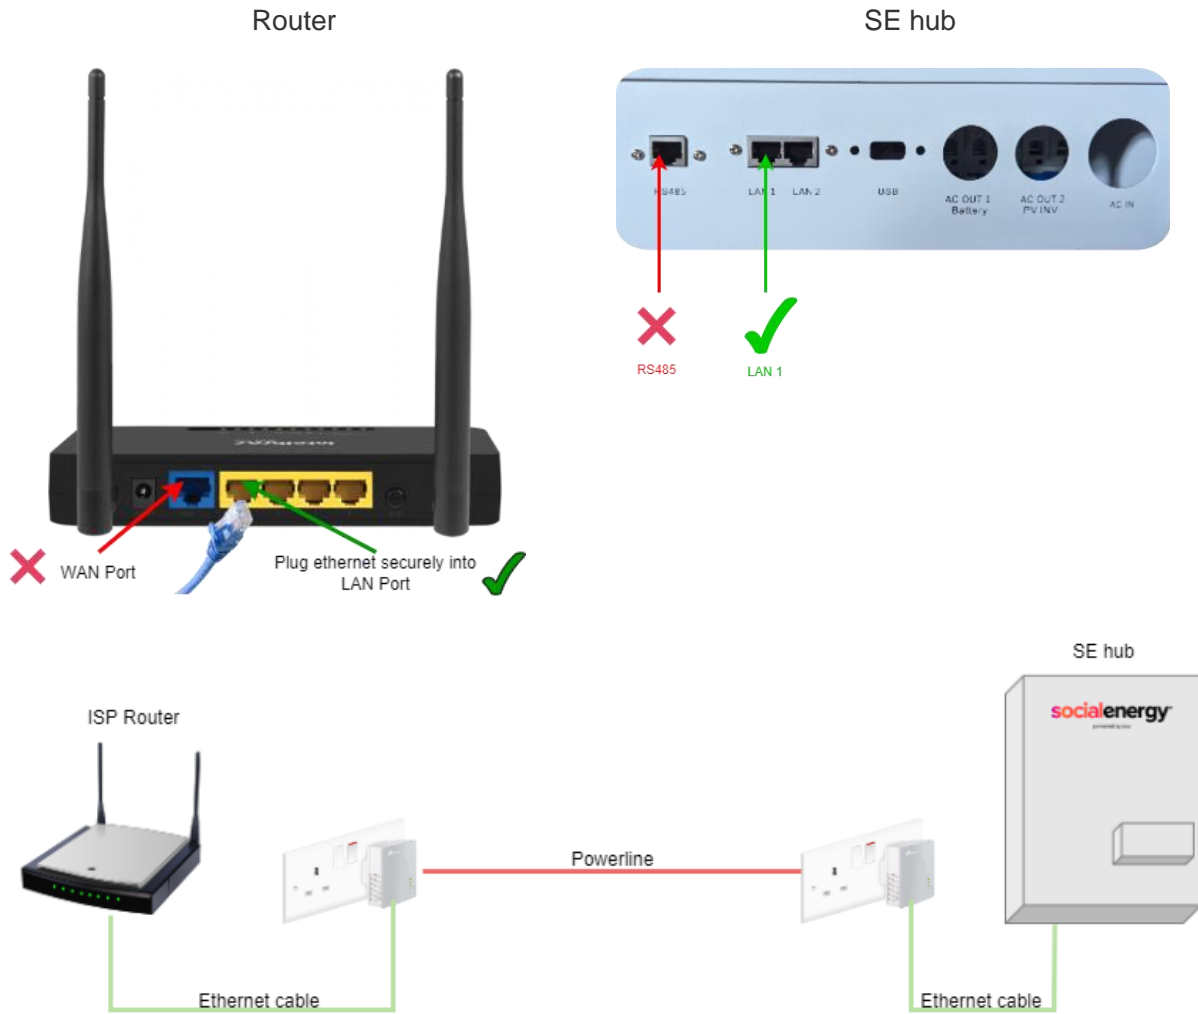**Note:** If the Power light is not blinking, please press the pair button for a longer time.

b. Within 2 minutes, press and hold the Pair button on another Powerline Extender for one second. Then the Power lights on both Powerline devices will be blinking quickly at the same time.

c. When the Powerline LED turns on, the new device has been successfully added to your Powerline network.

Step 3: Relocate the Powerline adapters.

After the powerline lights on both Powerline adapters are all lit up, please connect one Powerline adapter to one of your router's LAN ports (Not a WAN port) via an Ethernet cable and then plug in the second Powerline adaptor as close to the SE hub as possible and connect it to the LAN 1 port on the underside of the hub via an ethernet cable.

Router   SE hub

RS485   LAN 1

WAN Port   Plug ethernet securely into
                        LAN Port

SE hub

ISP Router

Powerline

Ethernet cable   Ethernet cable

Notes:

1. For TL-PA201/TL-PA211 V1/TL-PA210 V1/TL-PA251 V1, you need to hold the Pair button 3-8 seconds to start the pairing procedure.

2. If you want to add more adapters, please press the pair button on one of the existing networks, then press the Pair button on the adapter which wants to be joined in the existing network. Simply add them one by one as the instruction above

3. If the Powerline light is red, it means the powerline adapter is experiencing poor signal strength. Try plugging it into another wall socket.

4. If you have a Powerline Extender, the default Wi-Fi name and password are printed on the Wi-Fi Info Card and device's bottom label.